



AERIAL WORK PLATFORM



AERIAL WORK PLATFORM/ACCESS

Trojan Battery - Rise Above the Rest

With over 85 years of experience, Trojan Battery delivers the world's most dependable, durable and powerful deep cycle batteries for use in aerial work platform (AWP)/access equipment.

Trojan's broad portfolio of flooded/wet, Deep-Cycle Gel™ and AGM batteries are available in 6-volt and 12-volt sizes and yield ideal performance in even the harshest conditions. Our award-winning flooded batteries feature Trojan's proprietary Maxguard® Advanced Design Separator and exclusive Alpha Plus® paste formulation. Together these technologies help extend the life of your battery, sustain performance and lower overall maintenance costs.

Our Deep-Cycle Gel™ and AGM batteries are maintenance free, require no watering and offer a convenient alternative to flooded batteries.

Trojan's AWP/Access products deliver superior performance and is why:

- Trojan Battery's Plus Series™ was awarded Best Overall winner in Lift and Access magazine's LLEAP Awards for its unique features and benefits
- The world's top aerial work platform manufacturers and rental companies trust Trojan batteries to deliver power for their equipment

With Trojan Battery, you can expect maximum uptime and more productive hours on the job allowing you to rise above the rest. We offer outstanding technical support provided by full-time applications engineers. *Trojan batteries are available worldwide through Trojan's Master Distributor Network.*


Call 800-423-6569 or 562-236-3000 for more information or visit us at www.trojanbattery.com.

Clean energy for life™

BCI GROUP SIZE	TYPE	CAPACITY ^A Minutes		CAPACITY ^B Amp-Hours (AH)		TERMINAL TYPE (See Below)	DIMENSIONS ^C Inches (mm)			WEIGHT lbs. (kg)
		@25 Amps	@75 Amps	5 Hr Rate	20 Hr Rate		L	W	H ^D	
6 VOLT DEEP CYCLE BATTERIES										
GC2	T-605	383	105	175	210	1,3,4,5	10 3/8 (264)	7 1/8 (181)	10 7/8 (276)	58 (26)
GC2	T-105	447	115	185	225	1,3,4,5	10 3/8 (264)	7 1/8 (181)	10 7/8 (276)	62 (28)
GC2	T-105 Plus	447	115	185	225	1,2,4	10 3/8 (264)	7 1/8 (181)	10 11/16 (272)	62 (28)
GC2	T-125	488	132	195	240	1,3,4,5	10 3/8 (264)	7 1/8 (181)	10 7/8 (276)	66 (30)
GC2	T-125 Plus	488	132	195	240	1,2,4	10 3/8 (264)	7 1/8 (181)	10 11/16 (272)	66 (30)
GC2H	T-145	530	145	215	260	1,3,4,5	10 3/8 (264)	7 1/8 (181)	11 5/8 (295)	72 (33)
GC2H	T-145 Plus	530	145	215	260	1,2,4	10 3/8 (264)	7 1/8 (181)	11 1/2 (292)	72 (33)
901	J250G	475	130	195	235	5	11 1/2 (292)	7 (178)	11 7/8 (302)	67 (30)
901	J250P	540	135	215	250	6	11 11/16 (297)	7 (178)	11 1/2 (292)	72 (33)
902	J305E-AC	645	160	250	305	5	12 1/4 (311)	7 (178)	14 3/8 (365)	83 (38)
902	J305G-AC	678	175	258	315	5	12 1/4 (311)	7 (178)	14 3/8 (365)	88 (40)
902	J305P-AC*	711	195	271	330	6	11 5/8 (295)	7 (178)	14 3/8 (365)	96 (44)
902	J305H-AC*	781	215	295	360	6	11 5/8 (295)	7 (178)	14 3/8 (365)	98 (45)
903	L16E-AC	766	185	303	370	5	12 1/4 (311)	7 (178)	17 (432)	100 (46)
903	L16G-AC	789	200	320	390	5	12 1/4 (311)	7 (178)	17 (432)	107 (49)
903	L16P-AC*	850	220	344	420	6	11 5/8 (295)	7 (178)	16 3/4 (424)	114 (52)
903	L16H-AC*	935	245	357	435	6	11 5/8 (295)	7 (178)	16 3/4 (424)	125 (57)
6 VOLT DUAL PURPOSE AGM BATTERIES										
GC2	6V-AGM	385	-	1400	154	6	10 1/4 (260)	7 1/8 (181)	10 3/4 (274)	65 (29)
12 VOLT CYCLING AGM BATTERIES										
27	27-AGM	158	-	77	89	6	12 9/16 (319)	6 13/16 (173)	8 11/16 (221)	64 (29)
31	31-AGM	177	-	82	100	6	13 7/16 (341)	6 13/16 (173)	9 3/16 (233)	69 (31)
6 VOLT DEEP-CYCLE GEL BATTERIES										
GC2	6V-GEL	394	-	154	189	5	10 1/4 (260)	7 1/8 (181)	10 7/8 (276)	69 (31)
12 VOLT DEEP-CYCLE GEL BATTERIES										
27	27-GEL	179	-	76	91	5	12 3/4 (324)	6 3/4 (171)	9 1/4 (234)	63 (29)
31	31-GEL	200	-	85	102	5	12 15/16 (329)	6 3/4 (171)	9 5/8 (245)	69 (31)

- A. The number of minutes a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- B. The amount of amp-hours (AH) a battery can deliver when discharged at a constant rate at 80°F (27°C) for the 20 Hr rate and 86°F (30°C) for the 5 Hr rate and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- C. Dimensions are based on maximum size. Dimensions may vary depending on type of handle or terminal. Batteries to be mounted with .5 inches (12.7mm) spacing minimum.
- D. Dimensions taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.

* Polyon™ Case

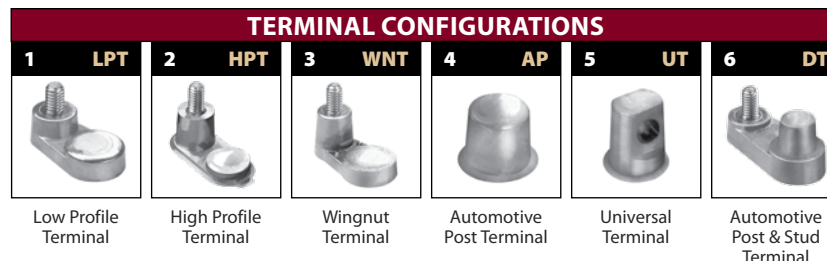

Trojan batteries are available worldwide through Trojan's Master Distributor Network. We offer outstanding technical support, provided by full-time application engineers.

For a Trojan Master Distributor near you, call 800.423.6569 or + 1.562.236.3000 or visit www.trojanbattery.com